



- Available in 10 – 16 tonne carrying capacities
- Fitted with front ramps enabling transportation of mini excavators etc
- Patented tail-door design enables the Dump Trailer to be used, with or without the tail-door in operation. No need for hydraulics
- Side panels manufactured from 5mm thick steel and supported by a continuous horizontal bulge bar to ensure excellent strength to weight ratio
- Body pivot hinge designed to ensure maximum height of discharge. Higher pivot point for easy stockpiling
- Wider and lower construction for better stability and ease of loading with rubber tyred or mini track excavators
- Body can be scraped clean using 6ft (1.8m) bucket

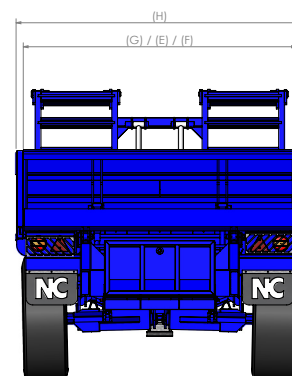

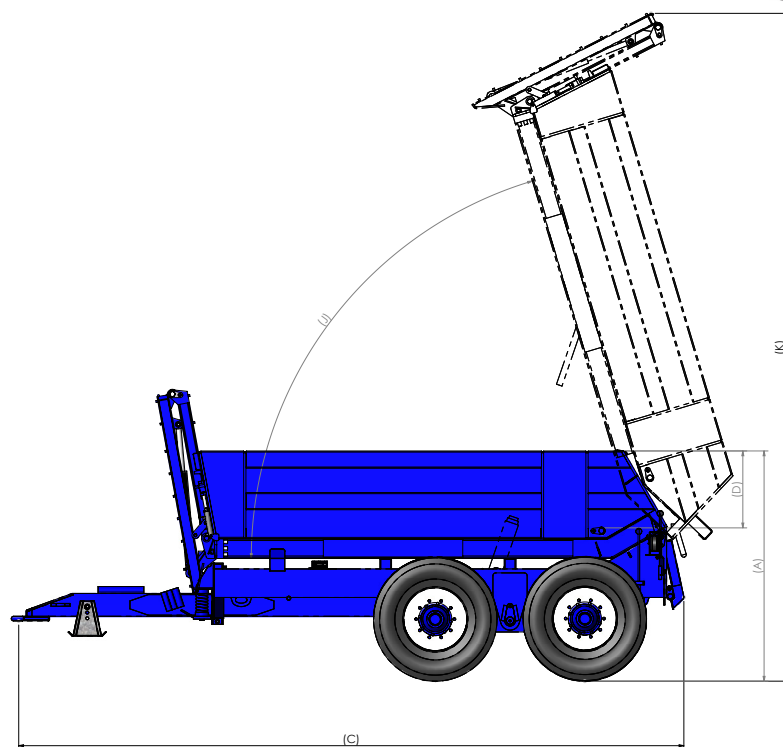

400 Series						
	Units	410 12T	412 12T	414 14T	416 16T	418 18T
Overall Height (A)	m	2.60	2.60	2.60	2.60	2.60
Body Length (B)	m	4.30	4.30	4.30	4.30	4.66
Overall Length (C)	m	5.83	5.83	5.83	5.83	6.23
Floor to top of side (D)	m	0.67	0.67	0.76	0.81	0.81
Width of floor (E)	m	2.39	2.39	2.39	2.39	2.39
Inside body width at top side (F)	m	2.39	2.39	2.39	2.39	2.39
Inside body width at bottom side (G)	m	2.39	2.39	2.39	2.39	2.39
Overall width (H)	m	2.50	2.50	2.50	2.50	2.50
Tipping Angle (J) °	°	73	73	73	72	73
Max height when tipped (K)	m	5.88	5.88	5.88	5.88	6.3
Number of axles	Qty	2	2	2	2	2
Floor Thickness	mm	8.00	8.00	8.00	8.00	8.00
Wall Thickness	mm	5.00	5.00	5.00	5.00	5.00
Volume m³	m³	4.30	5.70	6.30	7.20	8.00
Draw Bar	Type	Sprung	Sprung	Sprung	Sprung	Sprung
Axles	Type	80mm 8 Stud	80mm 8 Stud	90mm 10 Stud	100mm 10 Stud	120mm 10 Stud
Hydraulic Brakes	Type	350x60	350x60	400x80	400x80	420x180
Slack Adjusters	Type	Yes	Yes	Yes	Yes	Yes
Tyres	Type	385x65x22.5	385x65x22.5	385x65x22.5	385x65x22.5	18rx20