



- Designed to deal with lighter bulky materials
- Available in 8 – 16 tonne carrying capacities
- No tail door to ensure quick and easy emptying of load
- Side panels manufactured from 3mm thick steel and supported by a series of vertical bulge bars
- Higher body pivot point for easy stockpiling
- Tandem Springs not available

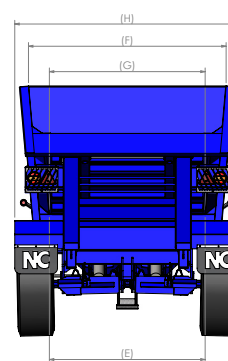

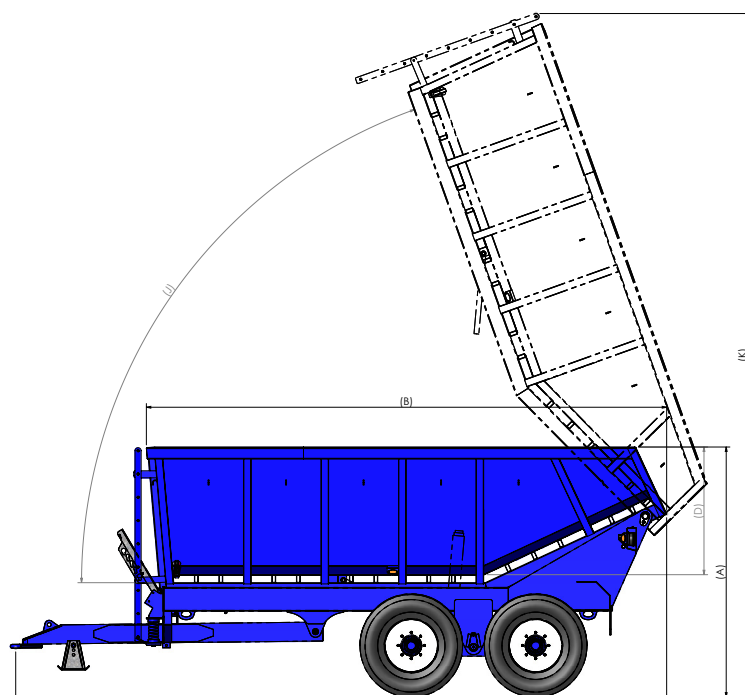

500 Series							
	Units	508 Single	508 Tandem	510 10T	512 12T	514 14T	516 16T
Overall Height (A)	m	2.40	2.32	2.58	2.58	2.58	2.58
Body Length (B)	m	5.17	5.17	5.39	5.89	6.59	6.59
Overall Length (C)	m	6.68	6.68	6.85	7.40	8.10	8.10
Floor to top of side (D)	m	1.09	1.09	1.345	1.345	1.345	1.345
Width of floor (E) m	m	1.30	1.30	1.465	1.465	1.465	1.465
Inside body width at top side (F)	m	1.68	1.68	1.857	1.857	1.857	1.857
Inside body width at bottom side (G) m	m	1.30	1.30	1.465	1.465	1.465	1.465
Overall width (H)	m	2.37	2.32	2.54	2.54	2.54	2.54
Tipping Angle (J)	°	70	70	70	70	70	70
Max height when tipped (K)	m	6.80	6.80	7.194	7.194	7.194	7.194
Number of axles	Qty	1	2	2	2	2	2
Floor Thickness	mm	4	4	4	4	4	4
Wall Thickness	mm	3.00	3.00	3	3.00	3.00	3.00
Volume	m ³	9.68	9.68	12.1	14.50	17.00	19.30
Draw Bar	Type	Fixed	Fixed	Sprung	Sprung	Sprung	Sprung
Axles	Type	90mm 8 Stud	70mm 6 Stud	80mm 8 Stud	80mm 8 Stud	90mm 10 Stud	90mm 10 Stud
Hydraulic Brakes	Type	400x80	300x60	350x60	350x60	400x80	400x80
Slack Adjusters	Type	Yes	No	Yes	Yes	Yes	Yes
Tyres	Type	385x65x22.5	385x65x22.5	385x65x22.5	385x65x22.5	385x65x22.5	385x65x22.5