



- Available in 10 – 16 tonne carrying capacities
- Hydraulic rear door, folding flat to floor
- Side panels manufactured from 5mm thick steel and supported by a continuous horizontal bulge bar to ensure excellent strength to weight ratio
- Option of 4 metre aluminium ramps with maximum carrying capacity of 6950 kgs (see table)
- Storage trays for aluminium ramps integrated into the chassis
- 4 floor hooks inside body for securing loads for safe transportation (eg Mini Digger)
- 5mm Hardox Floor



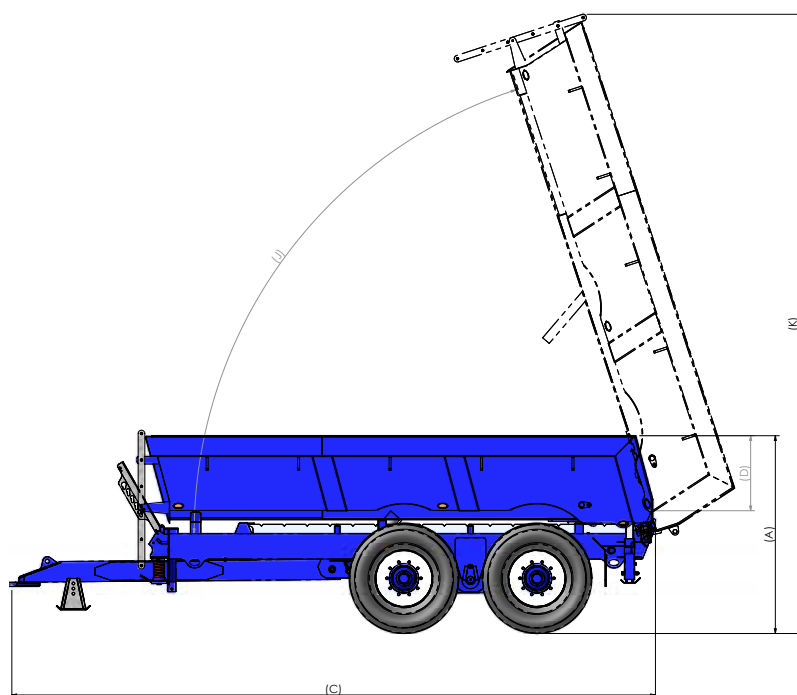

| 600 Series                           |                |             |             |              |               |
|--------------------------------------|----------------|-------------|-------------|--------------|---------------|
|                                      | Units          | 610 10T     | 612 12T     | 614 14T      | 616 16T       |
| Overall Height (A)                   | m              | 1.93        | 1.93        | 2.00         | 2.08          |
| Body Length (B)                      | m              | 5.00        | 5.00        | 5.00         | 5.00          |
| Overall Length (C)                   | m              | 6.34        | 6.34        | 6.34         | 6.34          |
| Floor to top of side (D)             | m              | 0.57        | 0.57        | 0.64         | 0.72          |
| Width of floor (E)                   | m              | 2.40        | 2.40        | 2.40         | 2.40          |
| Inside body width at top side (F)    | m              | 2.40        | 2.40        | 2.40         | 2.40          |
| Inside body width at bottom side (G) | m              | 2.40        | 2.40        | 2.40         | 2.40          |
| Overall width (H)                    | m              | 2.54        | 2.54        | 2.54         | 2.54          |
| Tipping Angle (J) °                  | 72             | 72          | 72          | 72           | 7.194         |
| Max height when tipped (K)           | m              | 6.10        | 6.10        | 6.10         | 6.10          |
| Number of axles                      | Qty            | 2           | 2           | 2            | 2             |
| Floor Thickness                      | mm             | 5.00        | 5.00        | 5.00         | 5.00          |
| Wall Thickness                       | mm             | 5.00        | 5.00        | 5.00         | 5.00          |
| Volume                               | m <sup>3</sup> | 5.70        | 5.70        | 6.40         | 7.20          |
| Draw Bar                             | Type           | Sprung      | Sprung      | Sprung       | Sprung        |
| Axles                                | Type           | 80mm 8 Stud | 80mm 8 Stud | 90mm 10 Stud | 100mm 10 Stud |
| Hydraulic Brakes                     | Type           | 350x60      | 350x60      | 400x80       | 400x80        |
| Slack Adjusters                      | Type           | Yes         | Yes         | Yes          | Yes           |
| Tyres                                | Type           | 385x65x22.5 | 385x65x22.5 | 385x65x22.5  | 385x65x22.5   |